


220-P

This inlet is specially designed for installation above corridors or pathways, in ceilings. The inlet is used to bring air from the attic into the house. Working with ceiling inlets, in turn, helps to pre-heat the temperature of incoming air. Through this inlet air is channeled directly down to the floor. This inlet has cords connected directly to the two inner flaps.

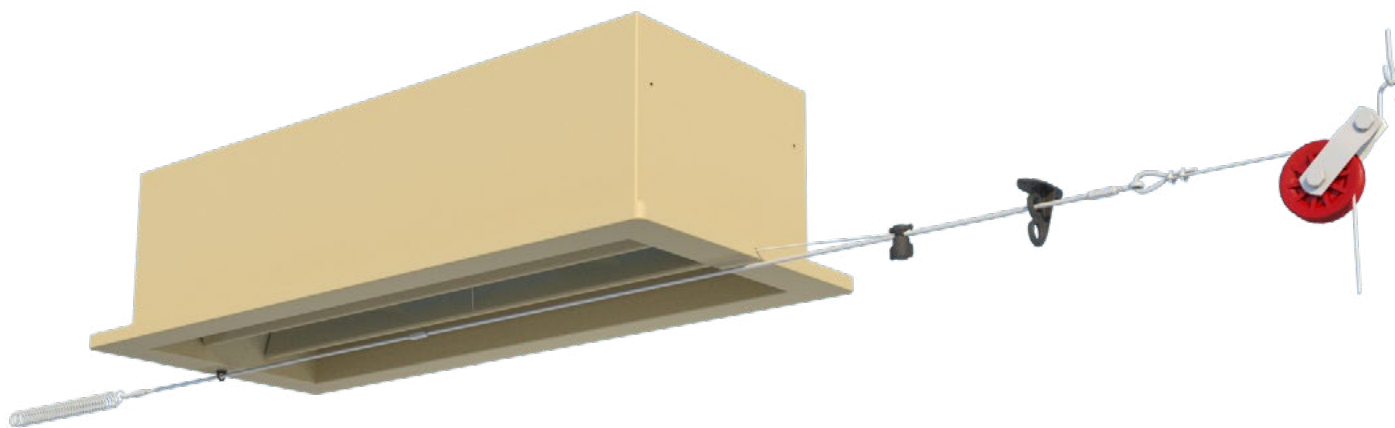

INFO

DATASHEET

ASSEMBLY

MOUNTING

WORKING

MAINTENANCE



220-P DATASHEET



CAPACITY

Model	m³/h @ 10 Pa	m³/h @ 20 Pa	m³/h @ 40 Pa
220-P	2265	2830	3300
	cfm @ 0.05 inH₂O	cfm @ 0.1 inH₂O	cfm @ 0.15 inH₂O
	1490	1859	1876

INFORMATION



Run	10 cm / 3.9 inch
Force	2,2 kg / 21.6 Newton
Number / pallet (1.20 x 1.00 x 2.40 m)	24
Weight / per inlet	4,2 kg / 9.3 lbs
Volume / per box	12


OPTIONAL ACCESSORIES

TPI-621

Cable clamp

AIR FLOW

[INFO](#)[DATASHEET](#)[ASSEMBLY](#)[MOUNTING](#)[WORKING](#)[MAINTENANCE](#)

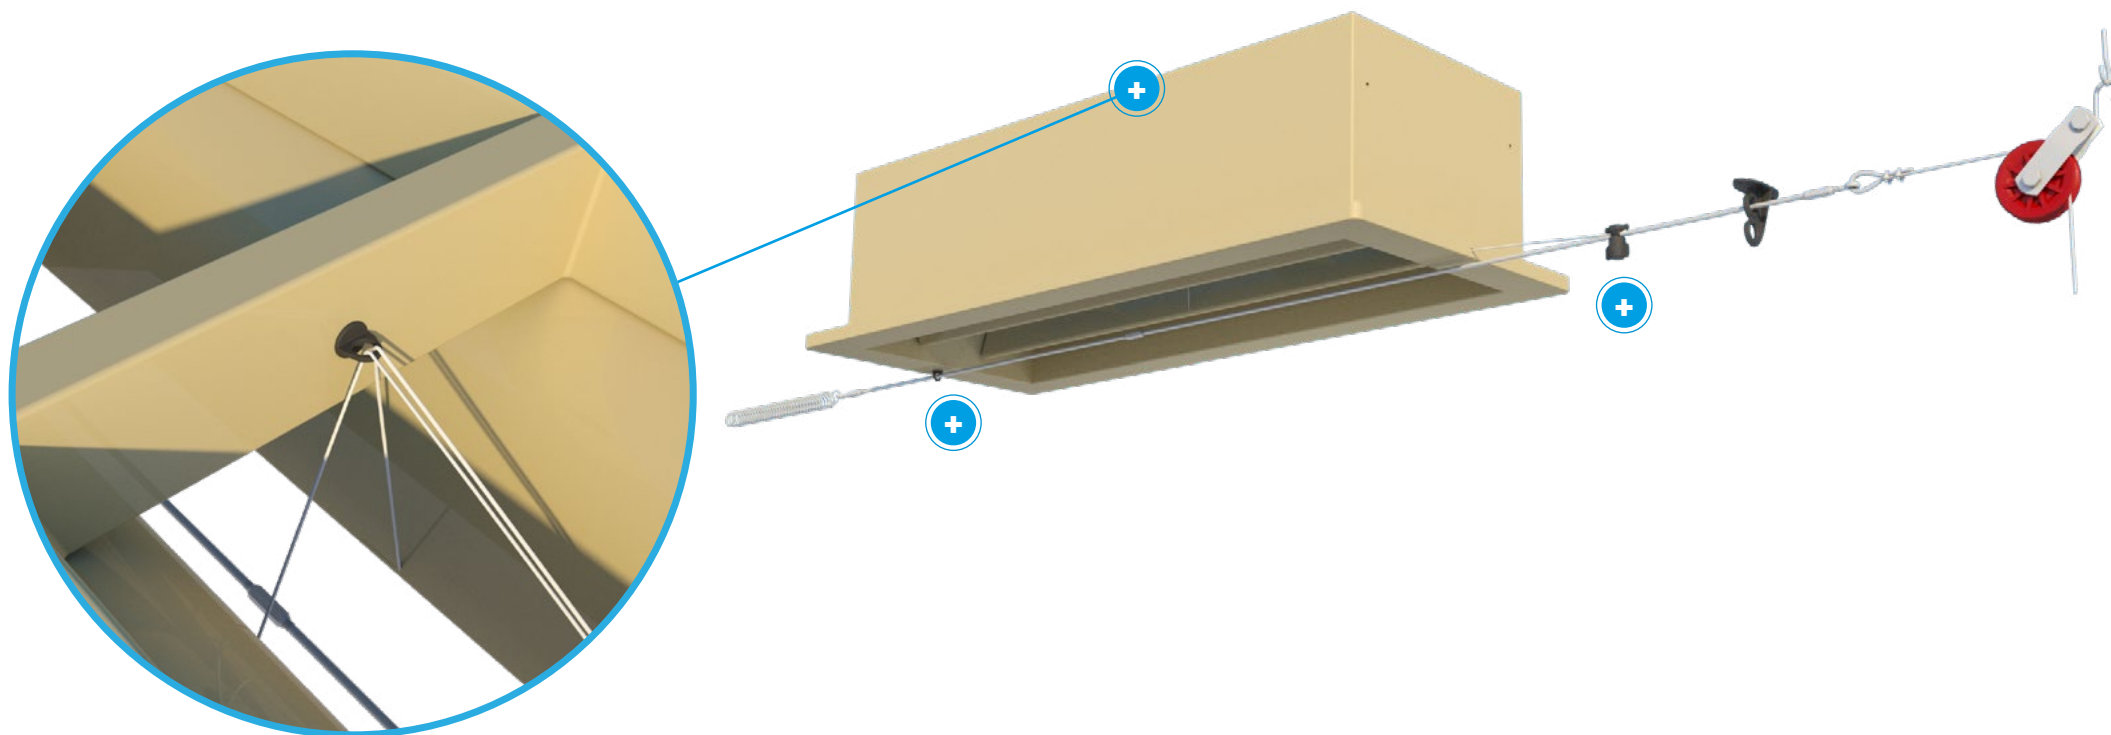

INFO


DATASHEET

ASSEMBLY

MOUNTING

WORKING

MAINTENANCE

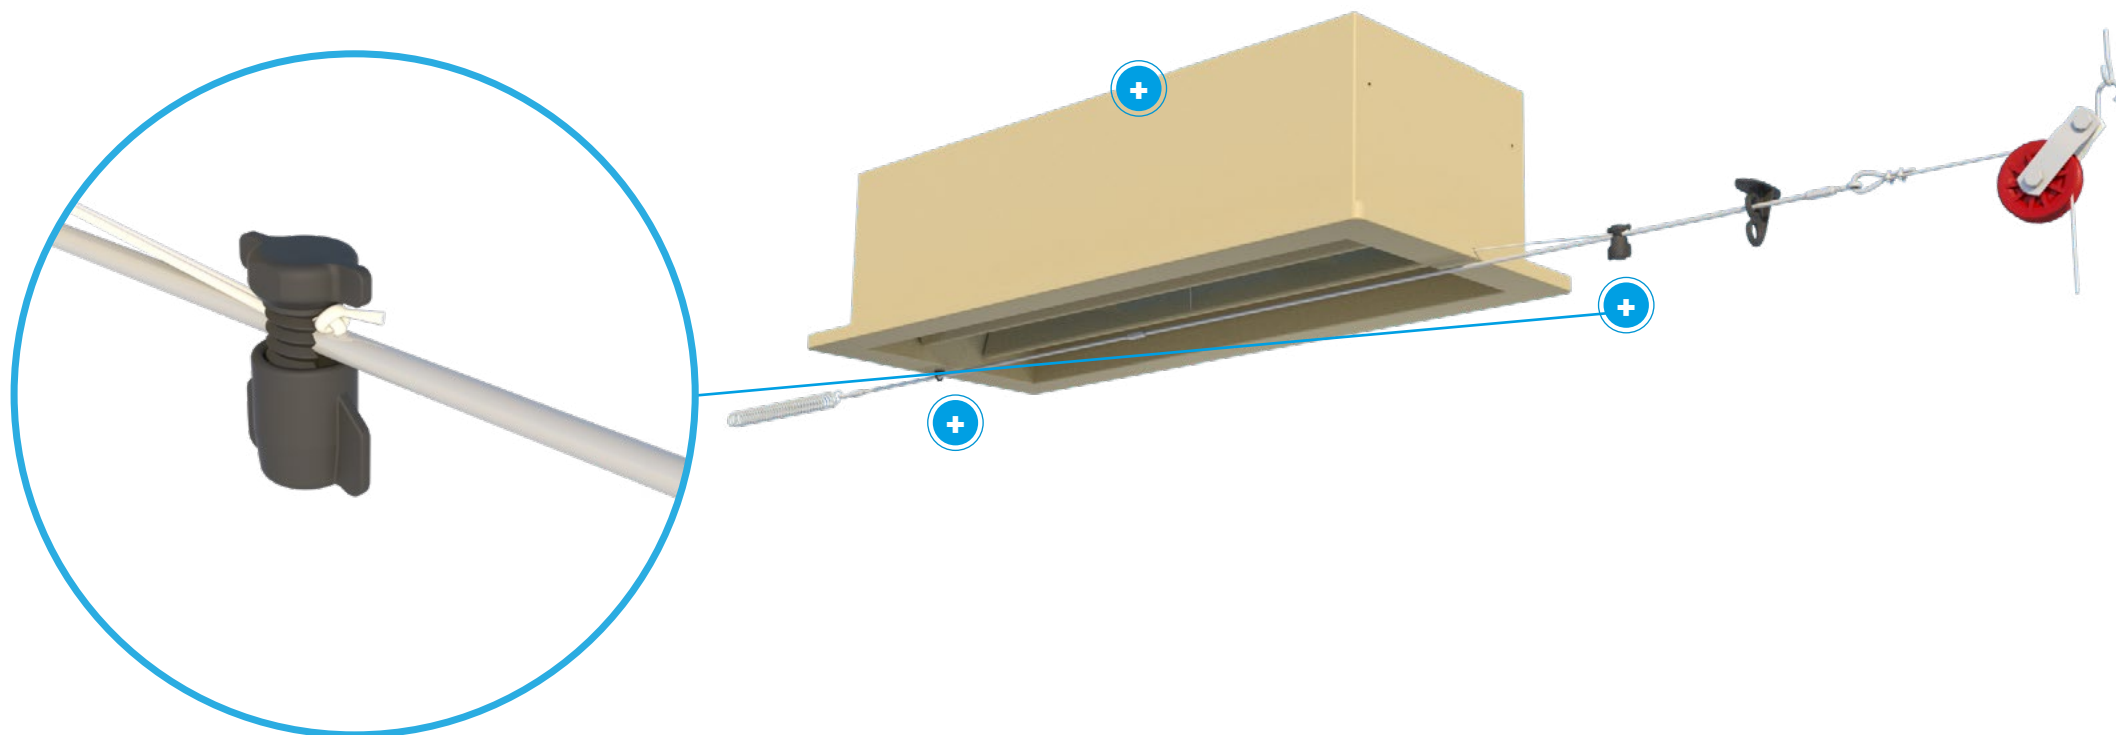

TPI-621

INFO


DATASHEET

ASSEMBLY

MOUNTING

WORKING

MAINTENANCE

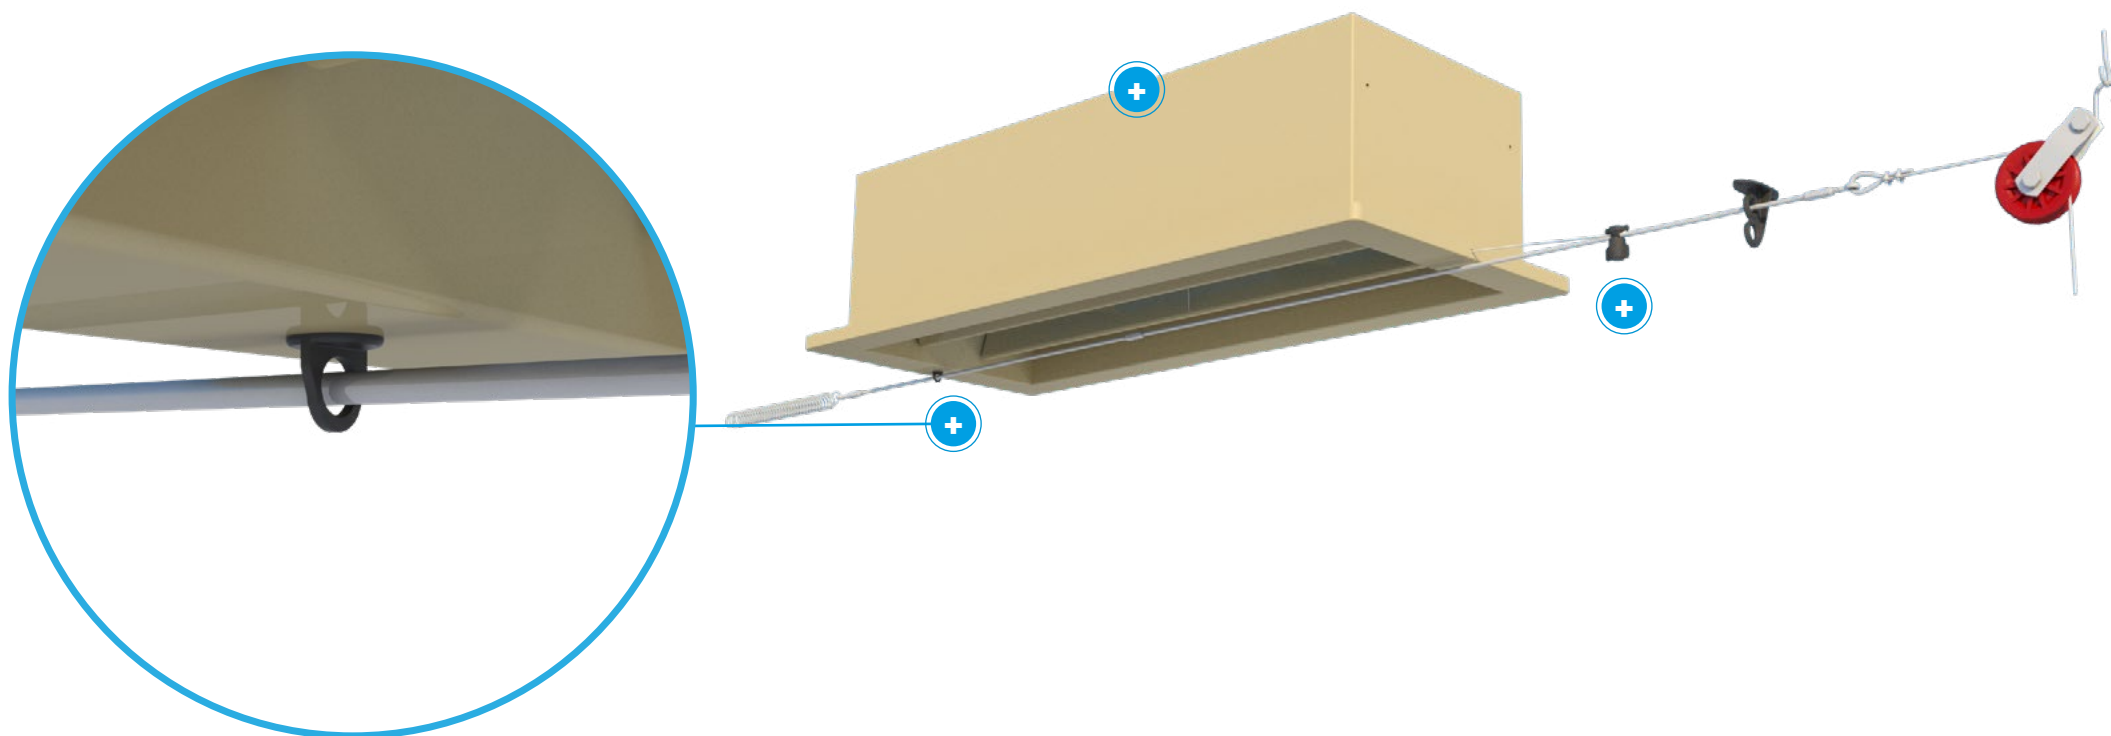

INFO

DATASHEET



ASSEMBLY

MOUNTING

WORKING

MAINTENANCE

All sizes are in cm and inches

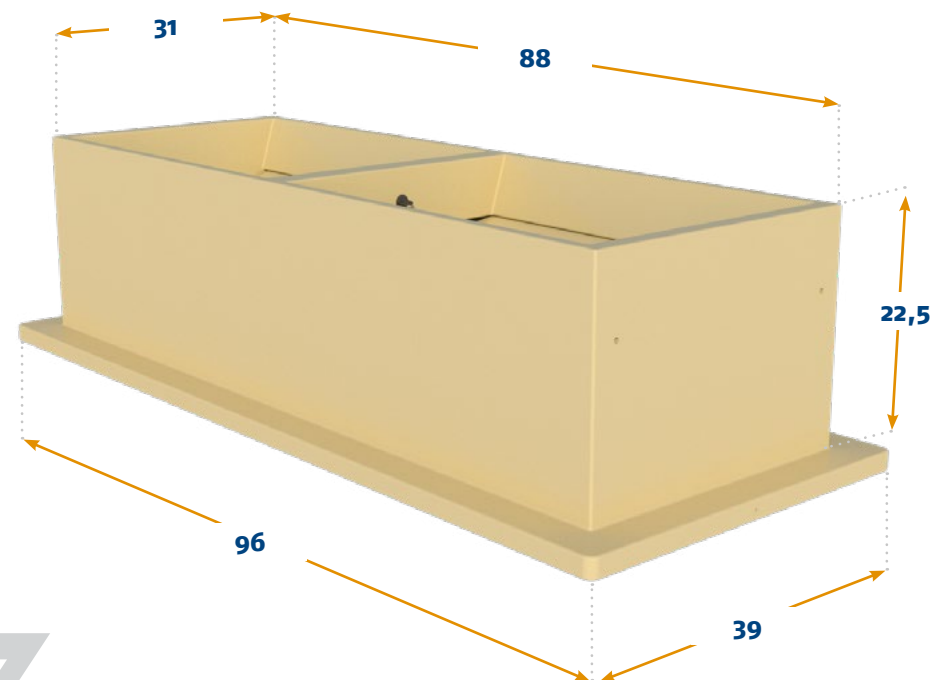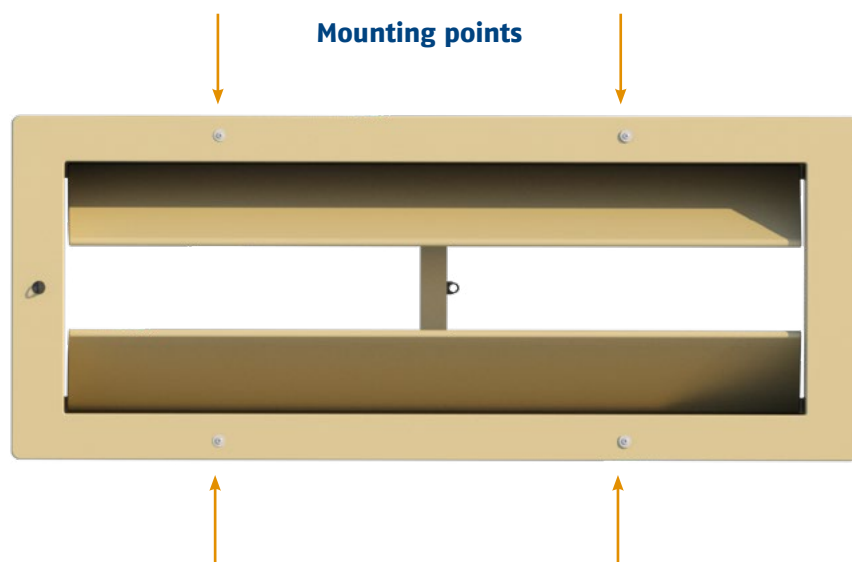

MOUNTING

Mounting type	Ceiling
Mounting hole size	90 cm / 35,43 inch x 33 cm / 12,99 inch



INFO

DATASHEET



ASSEMBLY

MOUNTING

WORKING

MAINTENANCE

AIR FLOW



220-P Corridor ventilation


This inlet is specially developed to drop air straight down into corridors. Installing this inlet directly above the animals is not recommended because incoming air should not drop directly onto the animals.

Working with end-weights or springs

We offer two products which can be used to keep tension on the main cable. A PVC cylinder which can be filled with concrete or sand to act as end-weight, or a spring that holds tension on the cable.

Pre-heating

The advantage of ceiling inlets is that the incoming air can be pre-heated in the attic of the house before entering the area where the animals are located.

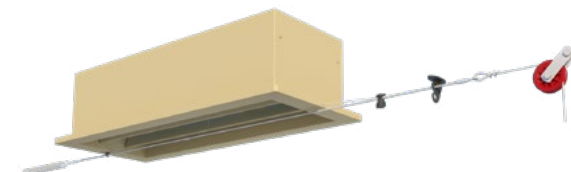

INFO

DATASHEET

ASSEMBLY

MOUNTING

WORKING

MAINTENANCE



WARRANTY / MAINTENANCE

WARRANTY

TPI-Polytechniek offers a 1 year warranty on manufacturers defects. This warranty covers any defects caused by faulty production or design flaws. For parts that are designed to move, wear and tear there is no warranty as these parts are intended and designed to be replaceable. To find details on which parts are marked as replaceable please contact TPI-Polytechniek for further information.

Since TPI-Polytechniek products are meant to be installed by professionals there is no warranty over installation mishaps or any damage caused by incorrect installation of the products herein. TPI-Polytechniek does offer a service warranty of 1 years over correctly and professionally installed products, therefore we strongly advise to use professional personnel.

Our polyurethane formula guarantees high insulation values but does not in any case guarantee that our products cannot freeze when in low temperatures. To ensure optimal functioning of your product(s) please contact your dealer or TPI-Polytechniek for information on installation, set-up adjustments and functionality.

Please note that under no circumstance TPI-Polytechniek is responsible for injuries or loss of life due to malfunction of our products!

INSTALLATION – SET-UP – MAINTENANCE

Make sure to mount inlets on a flat wall surface

A flat wall surface ensures optimal fitment and therefore air leakage will be reduced to a minimum. For optimal functioning make sure to caulk all sides of the inlet with a silicon sealant.

Layout Main Cable

In the layout, straight lines are recommended. Avoid additional pulleys. For additional information, please consult our support department.

Do not use foams or fillers to fill space in between the inlet and the wall

Foams and fillers might cause damage to the inlet or cause it to jam as they have different expansion values due to temperature differences. When in doubt, please ask your supplier for additional information.

Use screws with rivets for mounting the inlets into the wall, be aware of the polyurethane skin

With the use of rivets for mounting the inlets into the wall one can prevent the screw to sink into the flange or skin of the inlet. The outer skin of the polyurethane is hard but the force exerted on screws during installation might penetrate the skin.

For the set-up, connect the inlet to the main cable when in closed position

Make sure the inlet is closed when connecting it to the main cable, this will ensure all inlets are connected in the same modus and less adjustments are needed to optimize the set-up.

Cleaning

Pay close attention while cleaning the inlets, avoid using corrosive cleaning solutions that might harm the polyurethane. Also make sure not to use too much pressure with the pressure washers as it might damage the skin of the inlets. Use max. 120 bar at a minimal distance of 10cm and temperatures not exceeding 40°C

[BACK](#)